


## CCTV SECURITY

### ➤ indoor dome camera

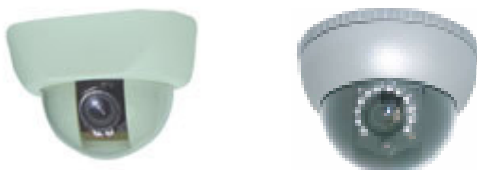

#### Features

- 1/3 Panasonic Color CCD Image Sensor
- 480 TV Lines High Resolution
- 0.5 Lux / F1.6 High Sensitivity
- AWB / AES & Sharpness Selectable
- 4 to 9mm Built in Vari-Focal DD Auto IRIS Lens
- 120mA Super Low Current Consumption
- S/N Ratio More Than 48dB (AGC off)
- Fast & easy installation
- Microphone inbuilt

### SVGA Monitors(High Resolution Colour)



- ITron / Philips 17" LCD Monitor
- X-VGA Input
- OSD (On Screen Display)
- 3 Year On Site Warranty
- Code: ITLCDP17

### CRT Video Monitors (High Resolution Colour)



- 15" Flat Screen Panasonic
- Composite Video/TV
- 1 Year Warranty

### ITron Professional Cameras



- ITron Professional Series
- 1/3 inch Sony Color CCD
- 480 TV lines
- 1 LUX / F2.0



- ITron Professional Series
- 1/3 inch Sony Color CCD
- 420 TV lines
- 1 LUX / F2.0

### Camera Housing & Accessories



- Outdoor Aluminium Housing
- Size 112mm(W) x 100mm(H) x 420mm(L)
- Weatherproof
- Suit ITron Professional Range Cameras

### Camera Brackets



- Indoor Camera Mounting Bracket
- 80mm(Dia) x 160mm(H)



- Camera Housing Mounting Bracket
- 295mm(L) x 86mm(W) x 99mm (H)
- Suit Outdoor housing

### Power Supplies



- Regulated Power Supply Unit, 12V DC, 3A

### Cable



- Standard RG59BU High Strain Cable with twin power cable

## Digital Video Recorder



### SPECIFICATION

Model	XRS-2004	XRS-2008	XRS-2016
Type	Embedded DVR		
HDD	Max. 2 HDD		
Output	VGA, analog, spot, S-VHS output		
OS	RTOS		
Video In	4CH	8CH	16CH
Audio In / out	4ch in / 1ch out, 2way audio		
Backup	USB, CD-RW, DVD-RW		
Display	120fps (100 fps)	240fps (200 fps)	480fps (400 fps)
Recording Speed	704x480 : 30fps, 704x240 : 60fps, 352x240 : 120fps / (NTSC) 704x576 : 25fps, 704x288 : 50fps, 352x288 : 100fps / (PAL)		
Resolution	704x480, 704x240, 352x240 (NTSC) 704x576, 704x288, 352x288 (PAL)		
Compression	MPEG4		
Average file size	3-5 Kbyte (352x240, 352x288) 5-10 Kbyte (704x240, 704x288) 6-16 Kbyte (704x480, 704x576)		
Recording mode	Manual, Schedule (Motion, Sensor, Time)		
Sensor / Relay	4 CH In / 1 CH Out	8 CH In / 8 CH Out	16 CH In / 16 CH Out
PTZ control port	RS-485 interface		
Network	10/100-Base-TX, RJ-45 / Live Monitoring, Remote Playback & File saving		
Remote Transmission	8 different levels of network transmission speed		
Remote Control	Remote recording, Search, Setup, backup		
Control type	IR Remote Control / Jog Shuttle		
Storage	500GB - 5000GB		
Operation Temp / Humidity	5°C to 50°C		
Power	DC 12V, 5A	100 VAS - 240VAC, 5A, 60/50 Hz	
Dimension	360(W) x 66(H) x 360(D)cm	430(W) x 87(H) x 460(D)cm	

*Design and specifications are subject to change without notice.*